

EC5
SS5151XH



ECLIPSE PRIME HEX is a outstanding RGBALC 6 color profile, covering full color range. It is compat-
ed with CCS technology, precised CCT from 1800-10000K, reaching super high CRI ≥95. ECLIPSE
PRIME HEX also has the perfect dimming curve and crystal-clear projection. It's designed for theater,
opera, TV, rental and show applications!



PRODUCT PARAMETERS

Optical system

Light source	
270W RGBALC	
Angle	
5°/10°/14°/19°/26°/36°/50°/15°-30°/25°-50°	
Luminous flux	CCT
10276lm	1800K-10000K
CRI/CRI R9/TLCI/CQS	
95/90/95/80	

Appearance

Size	578x371x226mm	Casing	Die-cast aluminum
Weight	8kg	Color	Black

Electrical Specs

Voltage	
100-240VAC,50/60Hz	
Max. Power	
280W	
Power Connection	
Power in and out	
DMX XLR	
3pin or 5pin in and out	

Control System


Dimmer	
0-100%16Bit	
Cooling	
Forced Convection	
Control	
DMX512, RDM	
Con Personality	
BASIC(3CH),SSP (8CH),TOUR (13CH),TR16 (20CH), HSIC (7CH),CMY (10CH)	
Display	
On board Control, 0-25Hz Strobe	

Work Environment


Ambient Temp	Certification
0°C-45°C	CE, MET
IP Rated	
IP20	

ILLUMINANCE AT DISTANCE

SS5151XH

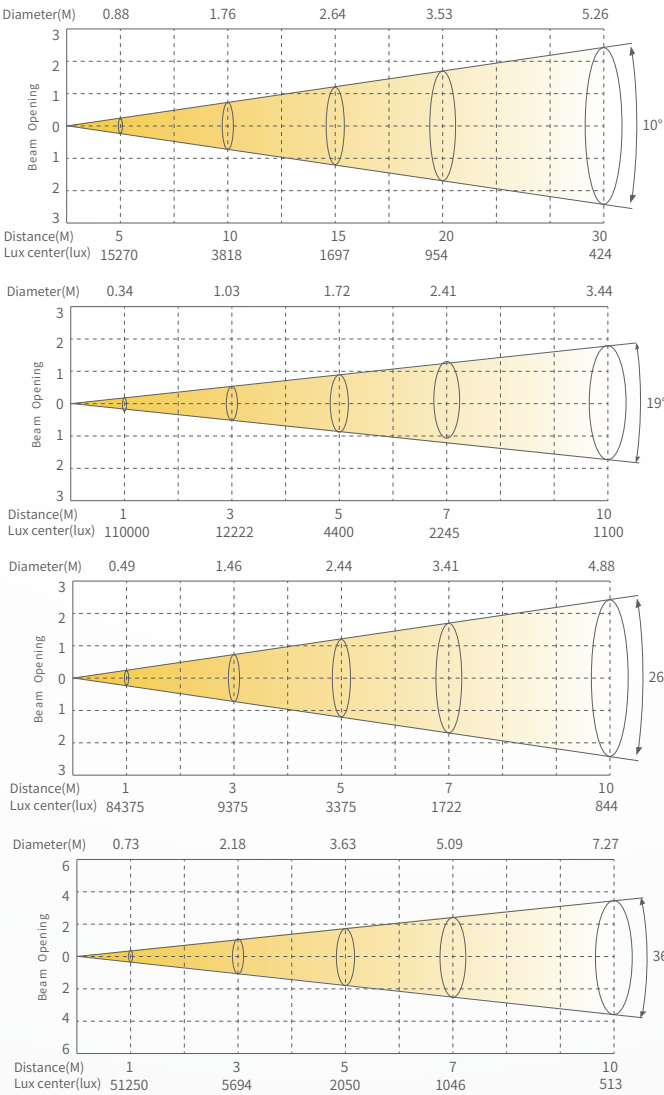

DIMENSIONS

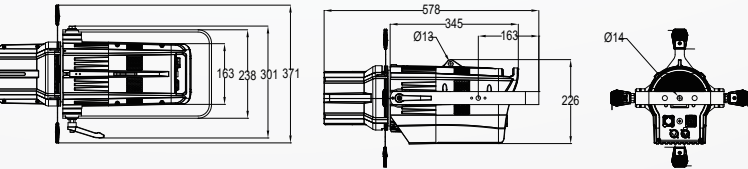

ACCESSORIES (Accessories not included unless otherwise stated)

