

# EC4

## SS847XAL



The ECLIPSE 1000 RGBAL is using the innovative 5 colors optic design. It comes with intelligent HSIC color management system, can easily pick up all colors you need. With precise preset 48 common colors, 1800K-10000K CCT, the perfect dimming curve, and the crystal-clear projection, and also it compatible with all our existing popular lenses. The ECLIPSE 1000 RGBLA is designed for the professional theatre / opera / rental / show applications!



### PRODUCT PARAMETERS

#### Optical system

|                                            |              |
|--------------------------------------------|--------------|
| Light source                               |              |
| 250W RGBAL                                 |              |
| Luminous flux                              | CCT          |
| 5157lm                                     | 1800K-10000K |
| Angle                                      |              |
| 5°/10°/14°/19°/26°/36°/50°/15°-30°/25°-50° |              |
| CRI                                        |              |
| SS847XAL: Ra≥90                            |              |

#### Appearance

|        |               |        |                   |
|--------|---------------|--------|-------------------|
| Size   | 600x370x370mm | Casing | Die-cast aluminum |
| Weight | 8.3kg         | Color  | Black             |

#### Electrical Specs

|                                 |
|---------------------------------|
| Voltage                         |
| 100-240VAC,50/60Hz              |
| Rated Power                     |
| 300W                            |
| Power Connection                |
| power in and out                |
| DMX XLR                         |
| DMX in and out                  |
| Display                         |
| On board Control, 0-25Hz Strobe |

|             |
|-------------|
| Control     |
| DMX512, RDM |

|                                                                              |
|------------------------------------------------------------------------------|
| Con Personality                                                              |
| HSIC(8CHS), SDO(6CHS), SIMPLE(8CHS),<br>COLOR8BIT(11CHS), COLOR 16BIT(17CHS) |


#### Work Environment

|              |
|--------------|
| Ambient Temp |
| 0°C-45°C     |
| IP Rated     |
| IP20         |


#### Certification

|         |
|---------|
| CE, MET |
|---------|

### ILLUMINANCE AT DISTANCE SS847XAL

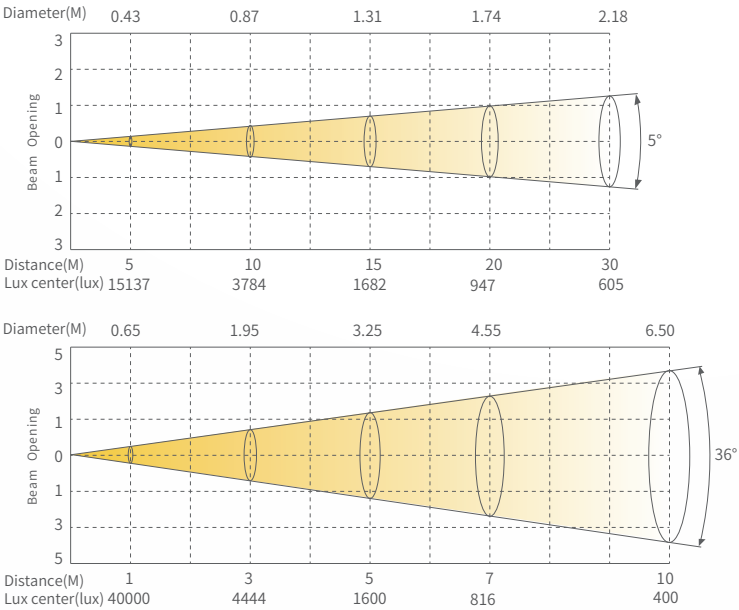

### DIMENSIONS

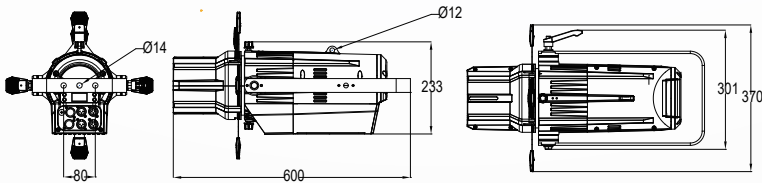

### ACCESSORIES (Accessories not included unless otherwise stated)

