

EC6

SS5154XH



EC6 is a compact and lightweight 6 colors profile, with uniform color mixing, clear projection. Equipped with intelligent color management system CCS, to ensure the color consistency. Built-in 1800-10000K high CRI CCT and 48 common used colors. Its integrated structural design, holding the sharp shutter framing system, and manual zoom 25-50°. It is perfect for theaters, multi-functional hall, church, conference room, and TV stations applications etc.



PRODUCT PARAMETERS

Optical system

Light source 200W RGBALC	
Luminous flux 7768lm	CTO 1800K-10000K
Angle 25-50°	CRI Ra 97

Appearance

Size	568x224x191mm	Casing	Flame-retardant plastic (V0)
Weight	5.84kg	Color	Black

Electrical Specs

Voltage 100-240VAC, 50/60Hz
Rated Power 200W

Power Connection
power in and out

DMX XLR
3pin or 5pin in and out

Control System

Dimmer
0-100% 16Bit

Cooling
Forced Convection

Control
DMX/RDM

Display
On board Control, 0-25Hz Strobe

Con Personality
BASIC (3CHS) , SSP(7CHS), TOUR(12CHS),
TR16(18CHS), HSIC(7CHS), CMY(10CHS)

Framing system
4 blades, manual shutter

Work Environment



Ambient Temp
0°C-45°C

IP Rated
IP20


Certification

CE, MET

ILLUMINANCE AT DISTANCE SS867XCE

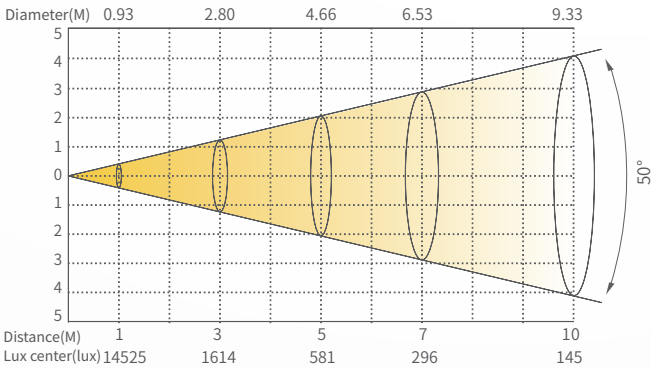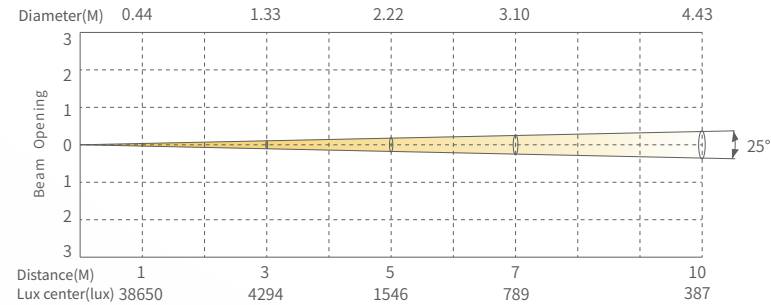

DIMENSIONS

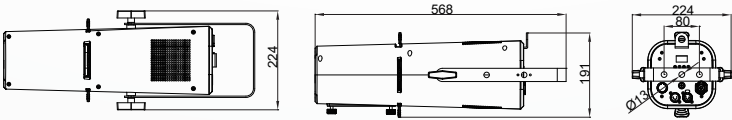

ACCESSORIES (Accessories not included unless otherwise stated)

