

F6

SS811SW HD/SC HD



This fixture is specialized designed for Theater, TV, and Studio. High brightness, high CRI, upholding our brand philosophy of energy conservation, environmental protection, and efficiency. Electronic zoom 15°-60°, 16bit dimmer smooth, no shaking.



PRODUCT PARAMETERS

Optical system

Light source 300W
Angle 15°-60°
Luminous flux 17000lm/18000lm

CCT 3200K/5600K
CRI/CQS/TLCI Ra 98 / CQS 96 / TLCI98

Appearance

Size 485x333x322mm
Weight 7.8kg
Casing Extruded aluminum
Color Black

Electrical Specs

Voltage 100-240VAC,50/60Hz

Max. Power 300W

Power Connection Power in and out

DMX XLR
DMX in and out

Control System

Dimmer 0-100% 16Bit

Cooling Forced Convection

Control DMX512

Display On board Control, 0-25Hz Strobe

Con Personality UNO(1CHS)、DOS(2CHS)、STD.P(5CHS)

Work Environment



Ambient Temp 0°C-45°C

IP Rated IP20



Certification

CE、MET


ILLUMINANCE AT DISTANCE SS9463SCM

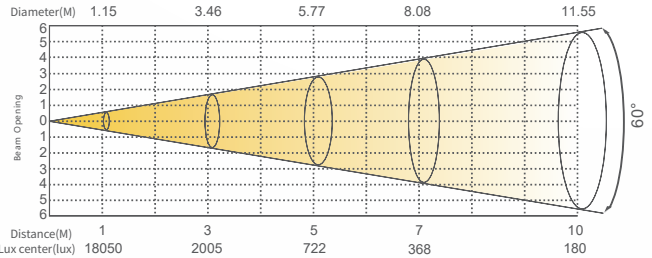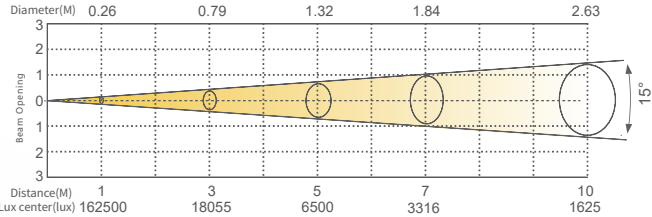


SS811SC HD

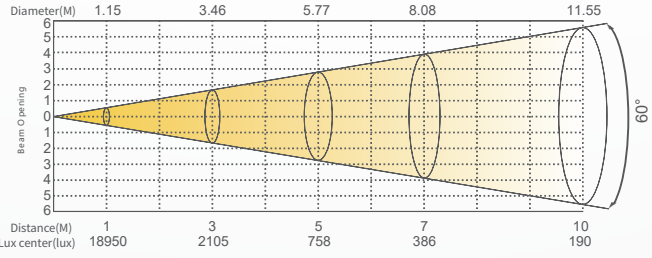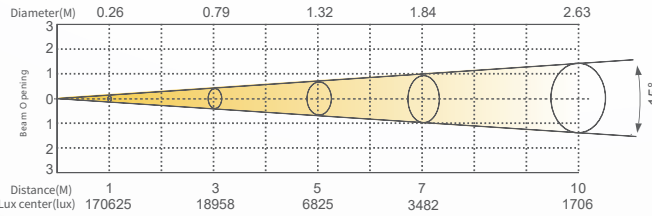


DIMENSIONS

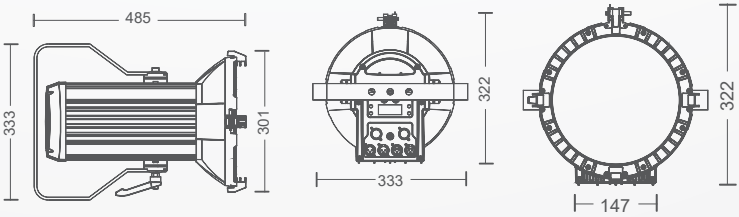

ACCESSORIES (Accessories not included unless otherwise stated)



Flightcase
(1320400112)



Barn doors
(6813100037)