

T8

SS9185SC HC

The T8 is a high-power LED moving profile with an efficient optical system combined with an intelligent electronic zoom of 5°-50°. With X/Y positioning smooth and accurate, professional color wheel show magic color effect, gobo wheel switch fast and sensitive, the effect is more colorful. Professional framing systems can cut out any polygon. Professional frost can meet the needs of stage washing. The customized iris will show the flexibility of the spot more vividly. This product is specially developed for theater, cultural hall, multi-function hall, banquet hall and rental performance venue.



PRODUCT PARAMETERS

Optical system

Light source	Angle
600W	5°-50°
CRI	illumination
95Ra	58000Lx@5M

Appearance

Size	483x283x746mm	Casing	Flame-retardant engineering plastic housing
Weight	35.5KG	Color	Black

Electrical Specs

Voltage	Max Power
100-240VAC,50/60Hz	890W
Power Connection	Signal socket
power in	3pin or 5pin in and out, RJ45 in and out

Control System

Pan/Tilt rotation
540°/270°(8-16bit)
Dimmer
Opera dimming effect (0-100% 16Bit dimming)
Cooling
forced air cooling
Control
Display board control static, custom mode, 0-25Hz stroboscopic
Control
DMX512、RDM、SACN、ARTNET、W-DMX (optional)
tunnel mode
BASIC、STANDARD、EXTEND
Special function
Pan/Tilt movement blackout, User-selectable pan/tilt range

Effect synthetic system


Rotating Gobo	
7 rotating gobos+open, gobo-flow effect, gobo shaking effect, Bi-direction rotation	
Static Gobo	
10 gobo+open, gobo flow effect, pattern shaking effect	
Colors	
7 colors+open,rainbow-flow effect	
CMYK	
CMY, CTO	
Framing system	
4 shutters, smooth cutting, each cutting direction and Angle can be independently controlled;The single shutters can be completely closed, and the entire cutting module can be rotated ±90°	
Animation Wheel	
Bi-directional rotation,Speed adjustable	
prism	
One 5-facet prism, reversible rotation, adjustable speed	
Iris	
5-100% linear aperture adjustment with macro function	
Focus	zoom
With linear focus function	With linear zoom function
Frost	
A frost	
Work Environment	Certification
Ambient Temp	CE、MET
0°C-45°C	
IP Rated	
IP20	

Certification

CE、MET

ILLUMINANCE AT DISTANCE

SS9185SC HC

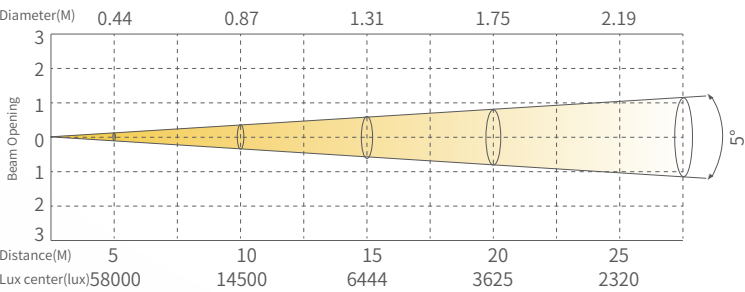


FIXED GOBO



Colors




Rotation Gobo



CMY+CTO




Framing System



Animation Wheel



DIMENSIONS

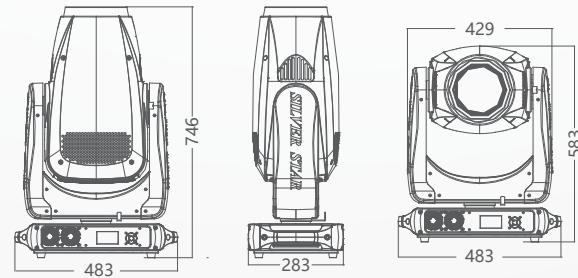

ACCESSORIES (Accessories not included unless otherwise stated)

